

G-Suit

TYPE : Extreme

Product Description

G-Suit Extrme is a high performance clear-coated aliphatic polyurethane film formulated to protect the surface of vehicles from stone chips, abrasion and corrosion. It is one of the best TPU film used for automotive interior material and provides superb quality of workmanship. It can be used for interior and exterior decoration to improve the appearance of any vehicle or painted surface. G-Suit is easy to apply, retains its gloss and resists yellowing and staining better. It also offers superior temperature resistance and self-cleaning performance for high durability and easy maintenance.

Feature

- Anti-chipping
- Excellent High Gloss
- Super Hydrophobic
- Anti-fouling
- Self-Healing
- Anti-oxidation
- Easy Cleaning
- Discoloration resistance
- Scratch resistance
- Temperature resistance
- Anti-Solvent
- Lactone based

Product Properties

Item	Description
Film thickness	150 μm
thickness	195~200 μm
Width	600~1,520mm
Length	15~30m
Release liner	Matt or Glossy PET
Adhesive	Solvent based acryl adhesive

Physical Properties

Property	Unit	Test Method
Gloss@60	Min 88	Gloss Meter
Tensile Strength	Min 250kg/cm ²	ASTM D412
Elongation	Min 300%	ASTM D412

Ad-winner

Adhesive power(24hours) Min 1,000g/25mm SUS304

Shelf Life

Ad-Winner recommends G-Suit Extreme to be stored at +10°C~+32°C, and 40%~60% RH. The film should be used after purchase.

Installation


G-Suit Extreme can be stretched extensively without harming it for proper fit. Also, it can be pulled back up if it is necessary to reposition. Generally, it is recommended to apply on wet surface condition.

Warranty

Ad-Winner gives a warranty to be free of any manufacturing or workmanship defects for three years from the date of purchase. The warranty doesn't cover damage caused by erroneous application, vehicle involved in an accident and intentional misuse or wear. Ad-winner will replace the film that doesn't meet this warranty. Limitation of remedies and liabilities are solely restricted to replacement of the defective film.

Notice

The representations of performance and suitability for use are meant for only as a guide.

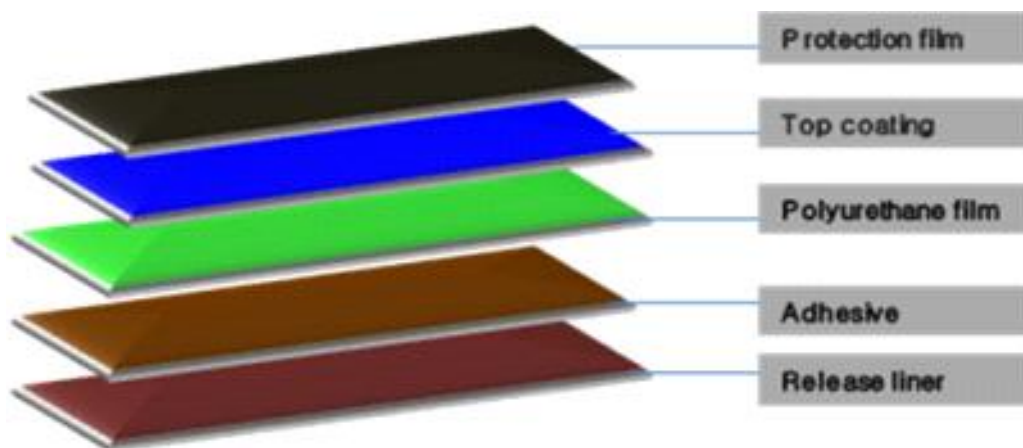

Film Construction

AAd - Winner

15.Jong ga-ro, Jung-gu, Ulsan Metropolitan city, Korea ULSAN FINE CHEMICAL INDUSTRY CENTER #307
TEL : 82-52-222-8874 FAX : 82-52- 222 -8875
Mobile Phone : 82-10-9514-9745
Home page : www.ad-winner.com